



# PULSION™ HOLLOW FIBER ROWS

PURON® Hollow Fiber Submerged Membrane Row for MBR Applications

## PRODUCT DESCRIPTION

<b>Membrane Chemistry:</b>	Proprietary PVDF
<b>Membrane Type:</b>	Braided hollow fiber for outside-in operation
<b>Fiber Support Chemistry:</b>	Polyester
<b>Nominal Pore Size:</b>	0.03 µm
<b>Outside Fiber Diameter:</b>	0.1 inch (2.6 mm)
<b>Regulatory Information:</b>	Accepted by California Department of Public Health (CDPH) for compliance with California Water Recycling Criteria (Title 22)
<b>Potting Material:</b>	Proprietary epoxy compound
<b>Storage Solution:</b>	Glycerin

## PRODUCT SPECIFICATIONS


<b>Part Number</b>	<b>Membrane Area ft<sup>2</sup> (m<sup>2</sup>)</b>
0728320	468 (43.5)

## OPERATING & DESIGN INFORMATION\*

<b>Temperature Range:</b>	41 - 104°F (5 - 40°C)
<b>Maximum Filtration Transmembrane Pressure:</b>	9 psi (0.6 bar)
<b>Maximum Backflush Transmembrane Pressure:</b>	9 psi (0.6 bar)
<b>Allowable pH Range for Cleaning:</b>	2.0 – 10.5
<b>Maximum Allowed Total Chlorine @ 95°F (35°C) or Lower:</b>	1,000 ppm @ pH 8 or higher during maintenance clean
<b>Maximum Allowed Total Chlorine @ 95°F (35°C) or Lower:</b>	2,000 ppm @ pH 8 or higher during recovery clean
<b>Maximum Allowed Total Chlorine Contact:</b>	500,000 ppm-hrs cumulative

\* Consult Process Technology Group for specific applications.

## NOMINAL DIMENSIONS & WEIGHT

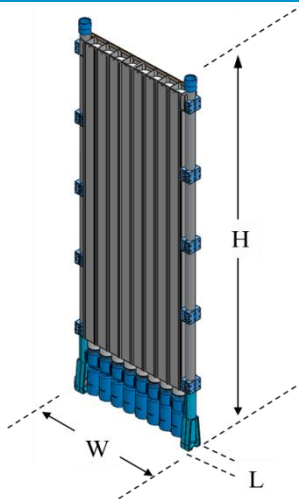

Part Number	L Inches (mm)	W Inches (mm)	H Inches (mm)	Dry Weight Pounds (kg)
0728320	3.2 (83)	33.6 (853)	96 (2,438)	108 (49)

Connections: Socket coupling. Connection kit is required for pilot use.

The information contained in this publication is believed to be accurate and reliable, but is not to be construed as implying any warranty or guarantee of performance. We assume no responsibility, obligation or liability for results obtained or damages incurred through the application of the information contained herein. Refer to Standard Terms and Conditions of Sale and Performance Warranty documentation for additional information

Koch Membrane Systems, Inc. [www.kochmembrane.com](http://www.kochmembrane.com)

**Corporate Headquarters:** 850 Main Street, Wilmington, Massachusetts 01887-3388, US, Tel. Toll Free: 1-888-677-5624, Telephone: 1-978-694-7000, Fax: 1-978-657-5208  
**European Headquarters:** Koch Chemical Technology Group Ltd., Units 3-6, Frank Foley Way, Stafford ST16 2ST, GB, Telephone: +44-178-527-2500, Fax: +44-178-522-3149

• Aachen DE • Lyon FR • Madrid ES • Milan IT • Wijnegem BE • Beijing & Shanghai CN • Mumbai & New Delhi IN • Melbourne & Sydney AU • Singapore • Sao Paulo BR • Dubai UAE •

For related patent and trademark information, visit [www.kochmembrane.com/legal](http://www.kochmembrane.com/legal)  
 Koch Membrane Systems, Inc. is a Koch Chemical Technology Group, LLC company.

© 2016 Koch Membrane Systems, Inc. All rights reserved worldwide.

01/16 Rev 16-1