



PURON[®] MP HOLLOW FIBER CARTRIDGE

8-inch Ultrafiltration Cartridge for Water and Wastewater Filtration

PRODUCT DESCRIPTION

| | |
|--------------------------|---|
| Membrane Chemistry: | Proprietary PVDF |
| Membrane Type: | Braided hollow fiber for outside-in operation |
| Fiber Support Chemistry: | Polyester |
| Nominal Pore Size: | 0.03 μm |
| Outside Fiber Diameter: | 0.1 inch (2.6 mm) |
| Housing Shell: | PVC |
| Potting Material: | Proprietary Epoxy Compound |
| Storage Solution: | Glycerin/Water |
| Regulatory Status: | Classified by UL to NSF/ANSI Standard 61 and in accordance with NSF/ANSI Standard 372 |

PRODUCT SPECIFICATIONS


| Part Number | Model | Membrane Area [ft ² (m ²)] | Typical Production Range [gpm (m ³ /hr)] |
|-------------|--------------------------------|---|---|
| 0728000 | PURON [®] MP 8081-102 | 546 (51) | 9 - 30 (2 - 6.8) |

OPERATING & DESIGN INFORMATION*

| | |
|--|---|
| Maximum Pressure (water): | 45 psi (3.0 bar) @ 104° F (40° C) or less |
| Temperature Range: | 32° F (0° C) - 104° F (40° C) |
| Maximum Production Transmembrane Pressure: | 25 psi (1.7 bar) |
| Maximum Backflush Transmembrane Pressure: | 10 psi (0.7 bar) |
| Allowable pH Range (continuous operation): | 4 - 9 |
| Allowable pH Range (short term): | 1.8 - 10.5 |
| Maximum Total Chlorine @ 77° F (25° C) or lower: | 1,000 ppm @ pH <10.5 |
| Typical Air Scour Rate per Cartridge: | 7 scfm (12 Nm ³ /hr) |
| Maximum Air Scour Rate per Cartridge: | 9 scfm (15 Nm ³ /hr) |
| Typical Backflush Flow Rate per Cartridge: | 19 gpm (4.3 m ³ /hr) |

* Consult KMS Process Engineering group for specific applications

NOMINAL DIMENSIONS*

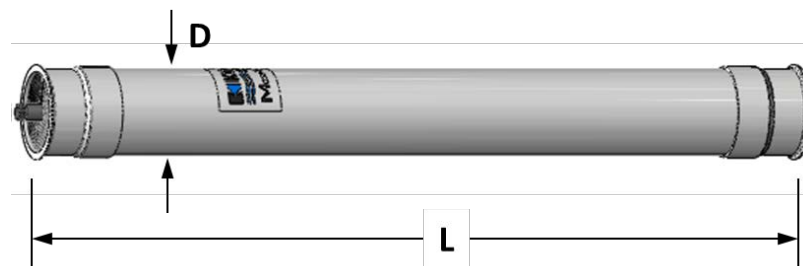

| Model | D Inches (mm) | L Inches (mm) |
|--------------------------------|------------------|------------------|
| PURON [®] MP 8081-102 | 8.6 (220) | 81 (2060) |

* Dimensions are provided for reference only and should not be interpreted as accurate specifications.

PURON® MP HOLLOW FIBER CARTRIDGE

CARTRIDGE STORAGE CONDITIONS:

New cartridges are packaged in a glycerin/water solution. The glycerin/water solution should be removed from new cartridges before their initial use with a water rinse followed by a chlorine clean. See the pre-startup cleaning instruction sheet packed with each cartridge shipment for more details. Prior to installation, cartridges should be stored in their original packaging under the following conditions:

- Indoors, out of direct sunlight.
- Temperatures between 50 – 85°F (10 – 30°C).
- Relative humidity below 70%.
- In a horizontal position.

It is best to use new cartridges within one year of shipment. Consult KMS for recommendations for longer term storage.

Used cartridges should be cleaned, rinsed and impregnated before storage using a solution of 80 – 100% glycerin. New cartridge storage conditions should also be used for used cartridges. Used cartridges must be drained, rinsed, and cleaned after storage per the pre-startup cleaning instruction sheet.


CARTRIDGE ASSEMBLY AND COMPONENTS:

| Item | Description | Quantity Required |
|------|------------------------------|------------------------|
| 1 | PURON® MP Cartridge | 1 each |
| 2 | 8" Seal | 2 each |
| 3 | 8" Clamp | 2 each |
| 4 | 8" Top End Cap | 1 each |
| 5 | 8" Bottom End Cap | 1 each |
| 6 | Vent Port O-rings | 2 each |
| 7 | Vent 1½" groove end coupling | 4 each (1 in Pass kit) |

PURON® MP Pass Kit (Items 3-7) Part Number – 1021034

Notes:

- Feed, permeate and vent ports are 1½" groove end couplings
- Air scouring connection is ½" OD tubing
- 8" seals (item 2) and O-rings (item 6) are included with the cartridge

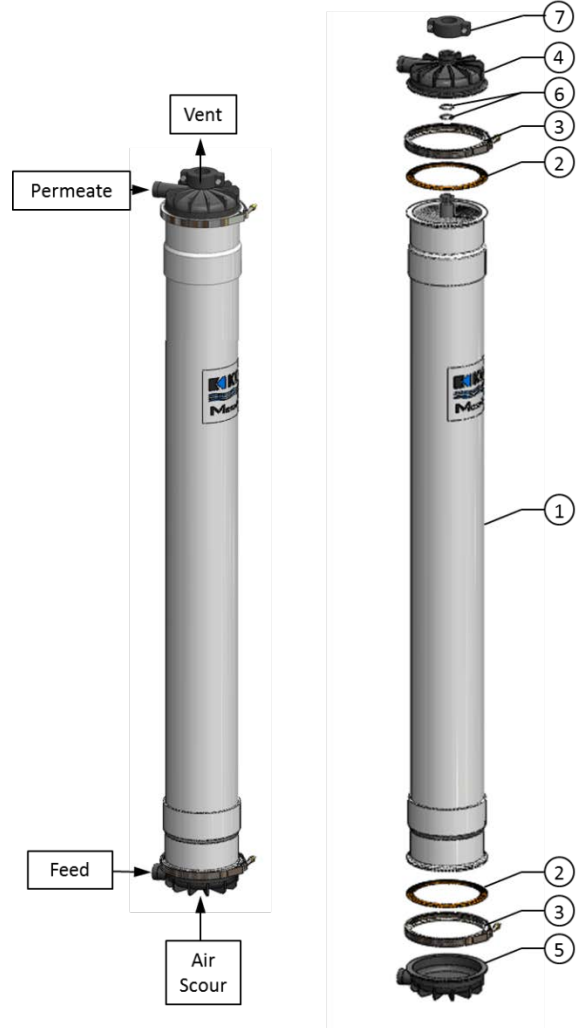

The information contained in this publication is believed to be accurate and reliable, but is not to be construed as implying any warranty or guarantee of performance. We assume no responsibility, obligation or liability for results obtained or damages incurred through the application of the information contained herein. Refer to Standard Terms and Conditions of Sale and Performance Warranty documentation for additional information.

Koch Membrane Systems, Inc., www.kochmembrane.com

Corporate Headquarters: 850 Main Street, Wilmington, Massachusetts 01887-3388, US, Tel. Toll Free: 1-888-677-5624, Telephone: 1-978-694-7000, Fax: 1-978-657-5208
 European Headquarters: Koch Chemical Technology Group Ltd., Units 3-6, Frank Foley Way, Stafford ST16 2ST, GB, Telephone: +44-178-527-2500, Fax: +44-178-522-3149

• Aachen DE • Lyon FR • Madrid ES • Milan IT • Wijnegem BE • Beijing & Shanghai CN • Mumbai & New Delhi IN • Melbourne & Sydney AU • Singapore • Sao Paulo BR • Dubai UAE •

For related patent and trademark information, visit www.kochmembrane.com/legal
 Koch Membrane Systems, Inc. is a Koch Chemical Technology Group, LLC company.
 © 2015 Koch Membrane Systems, Inc. All rights reserved worldwide.

06/15 Rev 15-1